



Ambisonic Subwoofer Collection

Landscape Burial Subwoofer



10BP-IG-70V • 10BP-IG-8ohm

SPECIFICATIONS

System Type

Driver Components

Crossover

Frequency Response

Max SPL @ 1m

Sensitivity, 1m/2.83V

Power Handling

Recommended Amp Power

Impedance

Input Connectors

Enclosure

Installation Burial Depth

Optional Part

Dimensions (H x W x D)

Weight, Net/Shipping

Warranty

10BP-IG-70V • 10BP-IG-8ohm SUBWOOFER

Compact Band-Pass In-Ground Subwoofer

10" Composite Cone All Weather Woofer

DSP LPF 80Hz – 120Hz

32Hz – 200Hz | 39 – 200Hz +/- 3dB

117dB Continuous, 122dB Peak

93dB

300W RMS, 800W Peak, Displacement Limited

300W (FTC) (70V) | 100W – 600W (FTC) (8ohm)

70V (10BP-IG-70V) | 8 Ω (10BP-IG-8ohm)

24" x 16 AWG Pigtail with Waterproof Wire Nuts

Composite Roto-Mold

In-Ground

Recommended Depth 12" (30cm) to 15" (38cm)

In-Ground 300W 70V Transformer (Part #JB1300)

24.17" x 12.8" x 12.8" (61.4cm x 32.5cm x 32.5cm)
& 9.4" (24cm) Canopy

25.6Lbs (11.6Kg) | 38.5Lbs (17.5Kg)

Limited 5 Year Warranty

*All product specifications are subject to change. Please refer to ambisonicsystems.com for latest information.





Scan the QR Code for full instructions for this product.

80hm Wiring





Includes a pair of silicon filled wire nuts for the connection

RED wire is positive
BLACK wire is negative

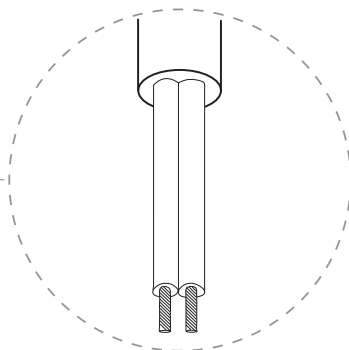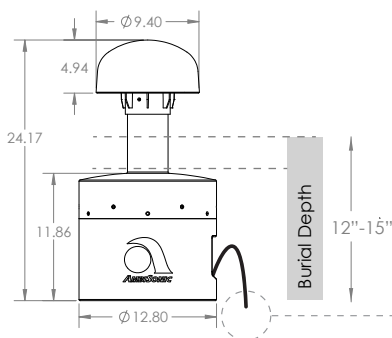

70V Wiring (Using JB1300)

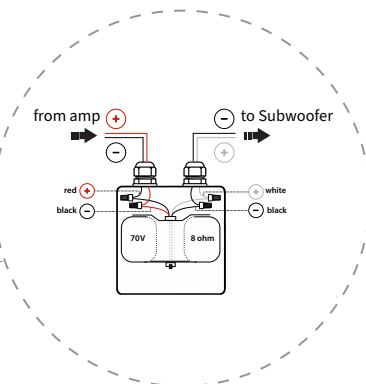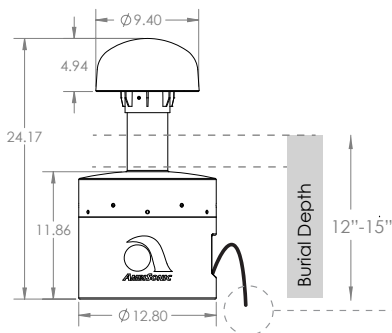

TECHNICAL ASSISTANCE

Please refer to ambisonicsystems.com for the full installation guidelines. If you have any questions or concerns about installing or using this product, you can reach us through one of the following methods:

Phone: (844) 674 - 4461

Hours of operation: 8:00am - 5:00pm (Pacific Time), Mon - Fri

Email: sales@originacoustics.com

