

DSUB6X2 SUBWOOFER



DEDICATED BASS

Our In-Ceiling DSUB6X2 Subwoofer was specifically engineered to generate the ideal sound combination for the 5", 6", and 8" Director range of speakers, with a seriously fast and easy install.

Equipped with dual 6" woofers, the DSUB6X2 manages to boost the bass of the install without interrupting seamless interior design.

PRODUCT ID





INSTALLATION ACCESSORY

SPEAKER VERSATILITY

Series loudspeakers, look no further. This bass boosting subwoofer offers a grille adaptor for extra design versatility, resulting in the ability to aesthetically match the apertures for any of our 6" or 8" speakers.

While installing any of our newly expanded Director 5"

SEAMLESS INTERIORS

A set of trim-ring options and both round & square grille options allow the ideal look to be achieved to match any interior.

THE MOST SIMPLE INSTALL

The DSUB6X2 Subwoofer is conveniently compatible with the reusable MOS36K mount, which was expertly designed to uniquely ensure the simplest and most seamless installation.

Compared to the traditional installation process, the reusable MOS36K mount eliminates the need for temporary wooden supports to be nailed in, ensuring time efficiency and perfect positioning every time.



DSUB6X2 SUBWOOFER



BUNDLE UP

Go ahead and pair a set of 4 speakers with our matching 5" aperture In-Ceiling DSUB6X2 Subwoofer and the latest Origin DSP60.8 Amplifier.



SOUND COVERAGE AND DESIGN

Remember, bigger and louder doesn't always mean better.

Balanced coverage is more important for entertaining vs alternative use case scenarios where budget must be sacrificed for necessary concert level power and volume.


Bearing in mind a smaller footprint will allow you to put more speakers in a room, for overall better sound; a set of multiple smaller speakers will fill a space more evenly than a pair of larger speakers (and allow you to create a much more tailored ambiance, at a lower cost!)

This way, you can take advantage of our smaller sized 5", 6", or 8" Director series speakers, to create your unique sound experience possible for each space, and easily boost the bass with this quick-install DUB6x2 subwoofer.

DSUB6X2 SUBWOOFER



LINE DRAWINGS

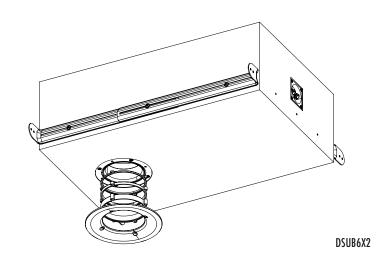

MODEL	DSUB6X2
Part	DSUB6X200
Height	7" (177 mm)
Width	14" (356 mm)
Length	22" (559 mm)
Weight	29.5lbs (13.4kg)

SPECIFICATIONS DSUB6X2

System Type Three Chamber Bandpass Vibration Canceling,

In-Ceiling Subwoofer

Driver Components Two 6.5" Poly Cone Subwoofers
Crossover Recommended LPF 150Hz or less

24 dB BW

Frequency Response 32Hz - 180Hz [- 10 dB]

40Hz - 150Hz [+/- 3 dB]

Maximum SPL @ 1m 111 dB Continuous, 114 dB Peak

Sensitivity (2.83V/1m) 90 dB

Power Handling 60W Pink Noise / 120W Program / 240W Peak

Recommended Amp Power 50 - 250 Watts (FCT) @ 4Ω


Rated Impedance 6Ω

Input Connectors Gold Plated Spring Push Terminals


Enclosure MI

Mounting Overlapping Formed Steel Straps,

Adjustable from 14.5''- 22.5''



6/8" ROUND/ SQUARE GRILLE ADAPTER





6/8" ROUND/ SQUARE GRILLES



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.