



# PPC-T

## PRODUCER SPEAKERS

### PRICE & PERFORMANCE

Our In-Ceiling PPC-T Speaker Series prides itself on going above and beyond the competition, by blending integrator friendly features with overall musicality, at an exciting price point. Each model is a 2-way loudspeaker with Silk tweeter, and front Mounted 8 ohm, 70/100v Tap Switch.

### PRODUCT ID



### EASY UPGRADES

The PPC-T Series are built with a standard dog-leg installation, yet reuse the same install brackets and cut-out templates as our Origin PRO PC In-Ceiling speakers, leaving the door open for simple future upgrades. They also incorporate the same premium transformer as the rest of the Professional collection, ensuring a smooth consistent sonic signature for all of your installations, regardless of style or placement.

### READY-TO-GO

Able to incorporate 8 ohm for residential projects, these PPC-T speakers also arrive ready for installation with a robust built-in transformer for even the most challenging commercial jobs. Ready-to-go, low-profile paintable grilles are included to reduce ceiling visibility.

### BUNDLE IT UP

Pair these speakers with the powerful PSUB10x2 Subwoofer and an Origin PRO ProA Amplifier for the optimal sound experience, with both High-Z or Low-Z system flexibility.



# PPC-T PRODUCER SPEAKERS

## SPECIFICATIONS

### PPC80T-8

### PPC60T-8

<i>Model</i>	<b>PPC80T-8</b>	<b>PPC60T-8</b>
<i>Part</i>	<b>PPC80T8000</b>	<b>PPC60T8000</b>
<i>Tweeter</i>	1"(25mm) Silk	1"(25mm) Silk
<i>Woofers</i>	8" (203mm) Polypropylene	6.5" (165mm) Polypropylene
<i>Frequency Response</i>	72Hz-20kHz -3dB   50Hz-20kHz -10dB	79Hz-20kHz -3dB   59Hz-20kHz -10dB
<i>Power RMS   Peak</i>	30W   100W	30W   100W
<i>Impedance</i>	8 ohm   70V	8 ohm   70V
<i>Transformer Taps</i>	30W, 15W, 7.5W, 3.75W	30W, 15W, 7.5W, 3.75W
<i>Mounting Depth</i>	4" (102mm)	3.27" (83mm)
<i>Cut-Out Diameter</i>	10.3" (262mm)	8.7" (221mm)

## SPECIFICATIONS







### PPC60TDT

### PPC50T-8

<i>Model</i>	<b>PPC60TDT</b>	<b>PPC50T-8</b>
<i>Part</i>	<b>PPC60TDT10</b>	<b>PPC50T8000</b>
<i>Tweeter</i>	Dual 1"(25mm) Silk	0.75" (20mm) Silk
<i>Woofers</i>	6.5" (165mm) Polypropylene	5.25" (133mm) Polypropylene
<i>Frequency Response</i>	79Hz-20kHz -3dB   53Hz-20kHz -10dB	82Hz-20kHz -3dB   62Hz-20kHz -10dB
<i>Power RMS   Peak</i>	30W   100W	30W   100W
<i>Impedance</i>	8 ohm   70V	8 ohm   70V
<i>Transformer Taps</i>	30W, 15W, 7.5W, 3.75W	30W, 15W, 7.5W, 3.75W
<i>Mounting Depth</i>	3.38" (86mm)	3.13" (79mm)
<i>Cut-Out Diameter</i>	8.7" (221mm)	7.4" (187 mm)

# PPC-T PRODUCER SPEAKERS

## LINE DRAWINGS

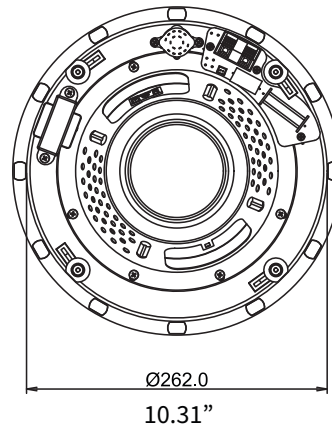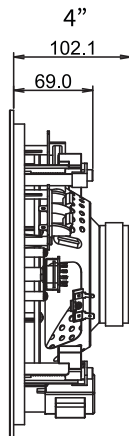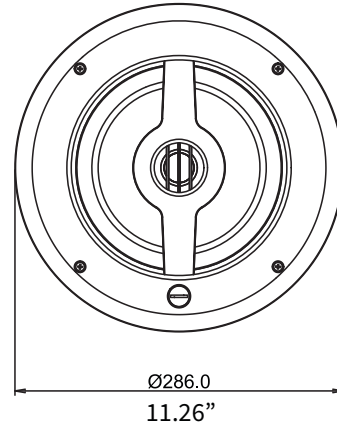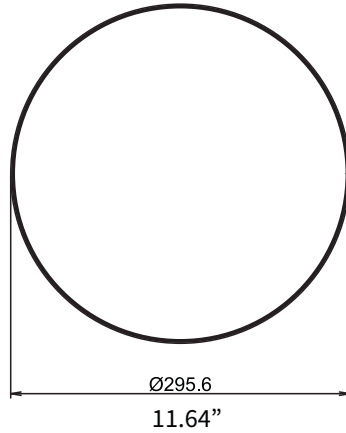







PPC80T-8



Please see [www.originpro.com](http://www.originpro.com) for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.

# PPC-T PRODUCER SPEAKERS

## LINE DRAWINGS

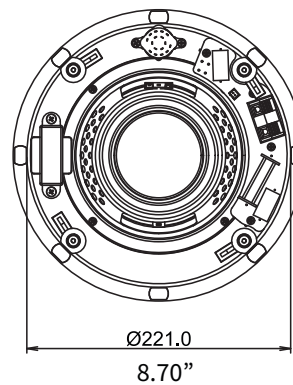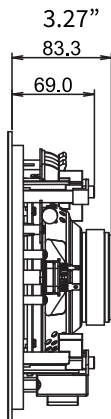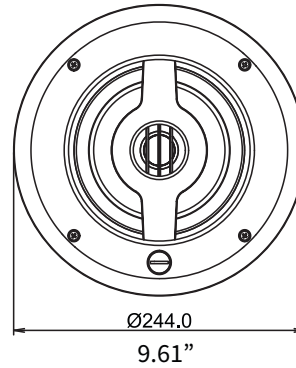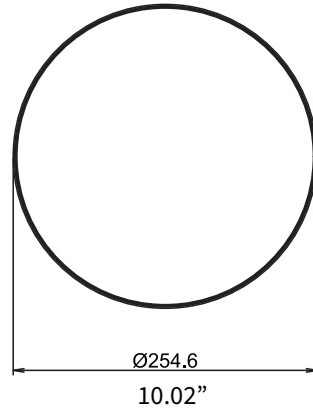







PPC60T-8



Please see [www.originpro.com](http://www.originpro.com) for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.

# PPC-T PRODUCER SPEAKERS

## LINE DRAWINGS

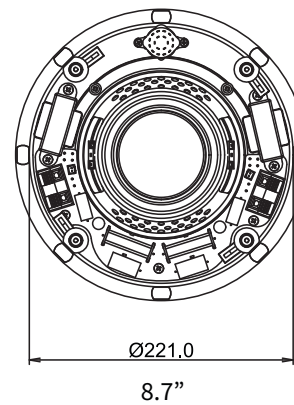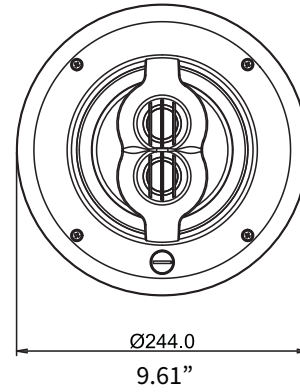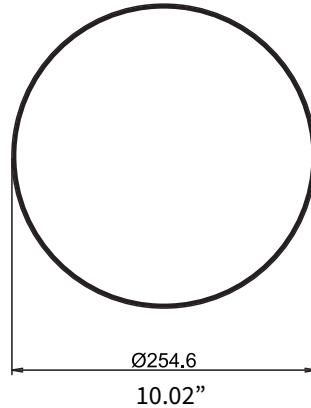


PPC60TDT

Please see [www.originpro.com](http://www.originpro.com) for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.

# PPC-T PRODUCER SPEAKERS

## LINE DRAWINGS

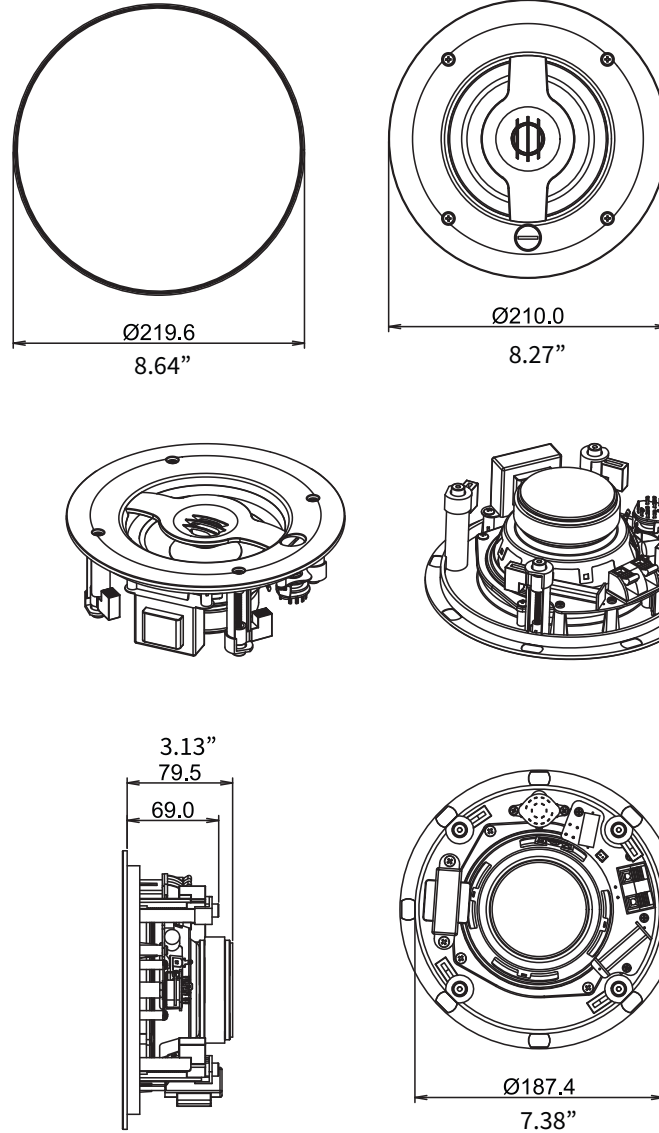

PPC50T-8



Please see [www.originpro.com](http://www.originpro.com) for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.