



WALL CONTROLLERS

PROZCB | PROZCW



ProZCB (BLACK)



ProZCW (WHITE)



OVERVIEW

The ProZCB | ProZCW networked / PoE controllers allow for quick and easy management of sound zones for any of our ProA125, ProA250, ProA1000, or ProA1200 series amplifiers. Along with a simple install and seamless configuration, they also offer PIN code set up, providing secure, protected access to the system.

These controllers can be wall mounted in a variety of locations, for personalized control of the amplifier settings, such as volume management and source selection. The user interface features both dark and light modes, and 4 preference options for screen brightness and button light levels, to ensure they camouflage neatly into any location.

FEATURES

- Connect up to 8 x ProZCB | ProZCW Wall Controllers per Origin PRO™ ProA Series amplifier
- Link each ProZCB | ProZCW Wall Controller to its uniquely configured sound zone via the synchronized Origin PRO amplifier web app
- Seamless integration with Origin PRO amplifier web app settings
- Instant network pairing and configuration for fast multi-zone system set up
- Quickly select or swap source devices
- Apply pre-set minimum and maximum volume levels per sound zone
- Save, export, and reapply speaker presets and amp configurations via our web app, then real-time sync to wall controllers
- Optional PIN code set up, including system shutdown option, which can be applied to allow access advanced features and settings
- Uses PoE technology for instant network pairing, and intuitive device syncing within complex systems
- User interface offers both dark and light mode options and 4 selection levels for screen brightness and button light
- High quality polymer construction and concealed screws
- Luxurious matte finish, with durable, high gloss, polished acrylic screen
- Simple user friendly menu for system set-up and access in minutes – and no-fuss handovers between team users!



WALL CONTROLLERS **PROZCB | PROZCW**

SPECIFICATIONS

MODEL

ProZCB (Black) | ProZCW (White)


Amplifier Compatibility	Origin PRO ProA125 ProA250 ProA1000 ProA1200 series amplifiers
Operating Temperature Range	0-40°C (32-104°F)
Display Screen Dimension	27.72 mm x 27.72 mm (excluding black border)
Display Screen Area	768.4 sq mm (excluding black border)
Display Screen Resolution	240 x 240 pixels
Display Screen Type	RGB, Transmissive / Normally Black
Display Screen Material	High gloss polished transparent acrylic
Exterior & Mechanical Parts Material	Plastic (ABS-PC)
Base Construction & Shield Material	Pre-galvanized steel
Power Consumption	PoE Class 1 / 3.84 W max
Power Supply	Power to the RJ45 ethernet port on the rear of device using a category 5e cable (or faster STP) with the use of a standard PoE switch, or PoE injector
Standby Modes	6 settings available: 30 secs, 2 mins, 5 mins, 15 mins, 30 mins, 60 mins
Connection & Data Protocol	RJ45
Maximum Cable Length (CAT 5e)	100m (328ft)
IP Rating	IP 30
External Dimensions (H x W)	115.1 x 70.6 mm (4.53 x 2.78 in)
External Dimensions (Depth)	23.1 mm (0.91 in) [From rear side of mounting plate to outer side of shield box] 42.8 mm (1.68 in) [From tip of rotary encoder dial to outer side of shield box]
Mounting Holes Distance (Center to Center)	83.5 mm (3.29 in)
Weight	120g (4.2oz.)




WALL CONTROLLERS

PROZCB | PROZCW

SYSTEM EXAMPLE

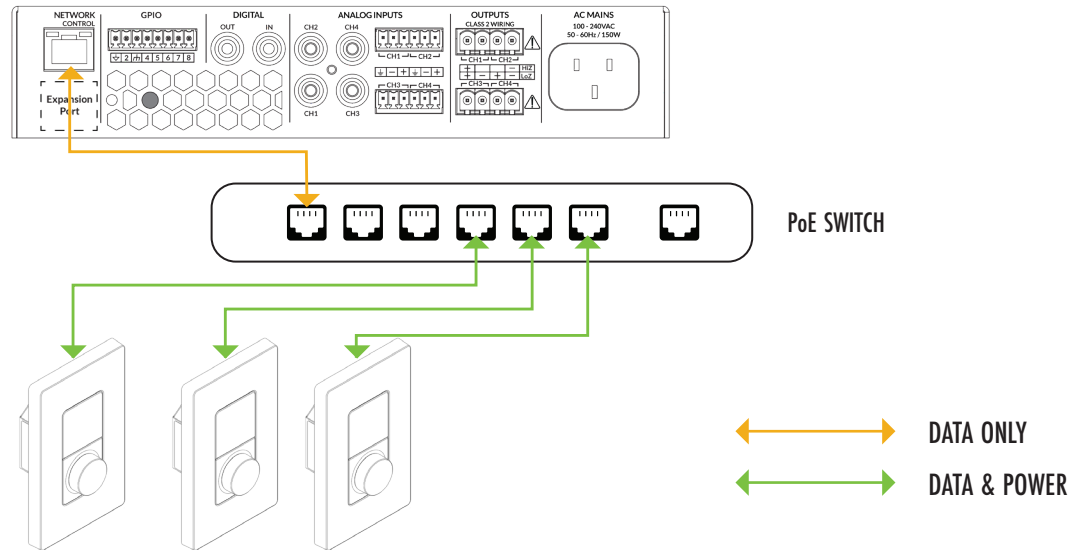

LINE DRAWINGS

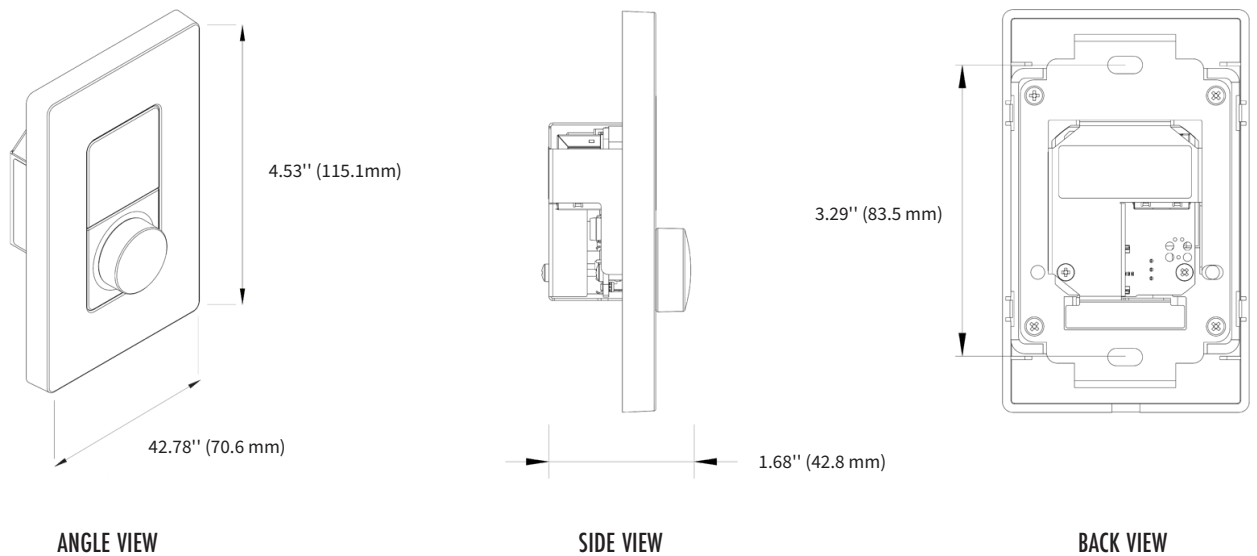

Please see www.originpro.com for the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.