

THINFIT™ LOUDSPEAKERS



SHALLOW DEPTH LOUDSPEAKERS

As audio installations have become more common, speakers are being placed in all types of environments. Sometimes, the requisite depth behind the drywall for a traditional in-wall or in-ceiling speaker does not exist. Our Explorer Thinfit Collection™ allows for speakers to be mounted in many of these locations.

PRODUCT ID



TF37EX



TF37DTEX



TFIW37EX

EASY FIT

Requiring less than two inches of mounting clearance, these speakers can be easily installed in all but the most restrictive spaces. Perfect for those oh-no moments when there's a surprise behind the drywall.

INTEGRATE INTO ANY WALL OR CEILING

The multiple woven glass-fiber woofers provide a surprising amount of low-end and volume, with the clarity and musicality you expect from Origin Acoustics. Available in three designs, two for ceiling applications and one D'Appolito model for in-wall use.

WOVEN GLASS-FIBER WOOFERS



1 7/16" (36MM)



1 21/32" (42MM)



1 7/16" (36MM)



THINFIT™ LOUDSPEAKERS

SPECIFICATIONS	TF37EX TF37DTEX
Cutout Diameter	ø 8 ¾" (222mm)
Speaker Diameter	ø 9 ⅝" (244mm)
Grille Diameter	ø 10" (254mm)
Mounting Depth	ø 1 21/32" (42mm) ø 1 7/16" (36mm)

SPECIFICATIONS	TF37EX	TF37DTEX
Part	STF3700EX	STF3700DTEX
Tweeter	¾" (20mm) Aluminum	Dual ¾" (20mm) Aluminum
Woofer	Quad 3 ½" (89mm) PP	Dual 3 ½" (89mm) Glass Fiber
Frequency Response	100Hz - 20kHz	120Hz - 20kHz
Power RMS Peak	30 watts - 100 watts	20 watts - 50 watts/channel
Nominal Impedance	8 Ω minimum	6 Ω minimum/channel
Temperature Range	177°C to -20°C (350° to -4°F)	177°C to -20°C (350° to -4°F)

SPECIFICATIONS	TFIW37EX
Cutout Dimensions	4 ⅝ x 16 7/16" (116 x 416mm)
Speaker Dimensions	5 ½ x 17 ½ x 1 7/16" (140 x 440 x 36mm)
Grille Dimensions	6 x 18" (152 x 452mm)
Mounting Depth	1 7/16" (36mm)

SPECIFICATIONS	TFIW37EX
Part	STFIW3700EX
Tweeter	¾" (20mm) Aluminum
Woofer	Quad 3 ½" (89mm) Glass Fiber
Frequency Response	90Hz - 20kHz
Power RMS Peak	30 watts - 100 watts
Nominal Impedance	6 Ω minimum
Temperature Range	177°C to -20°C (350° to -4°F)




Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.


THINFIT™ LOUDSPEAKERS



LINE DRAWINGS

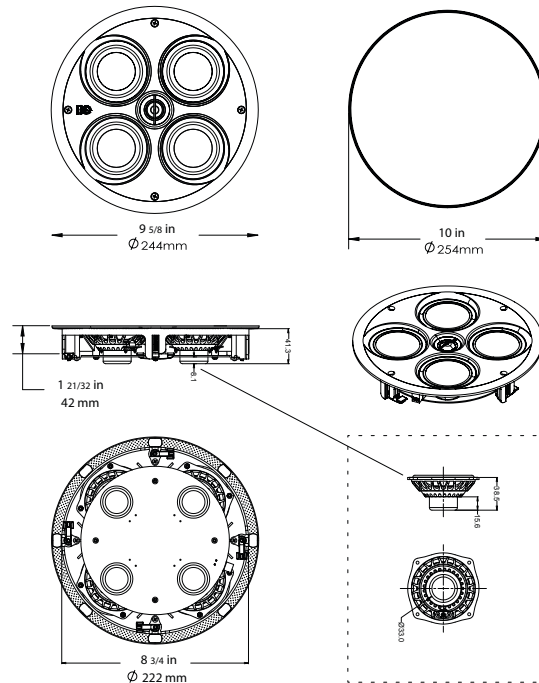

TF37EX

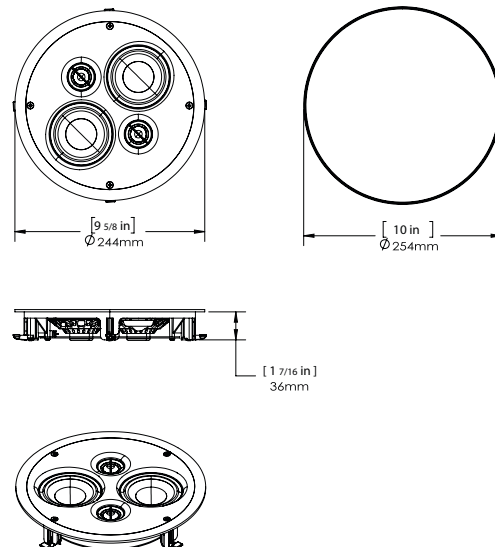

TF37DTEX




Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.



THINFIT™ LOUDSPEAKERS

LINE DRAWINGS

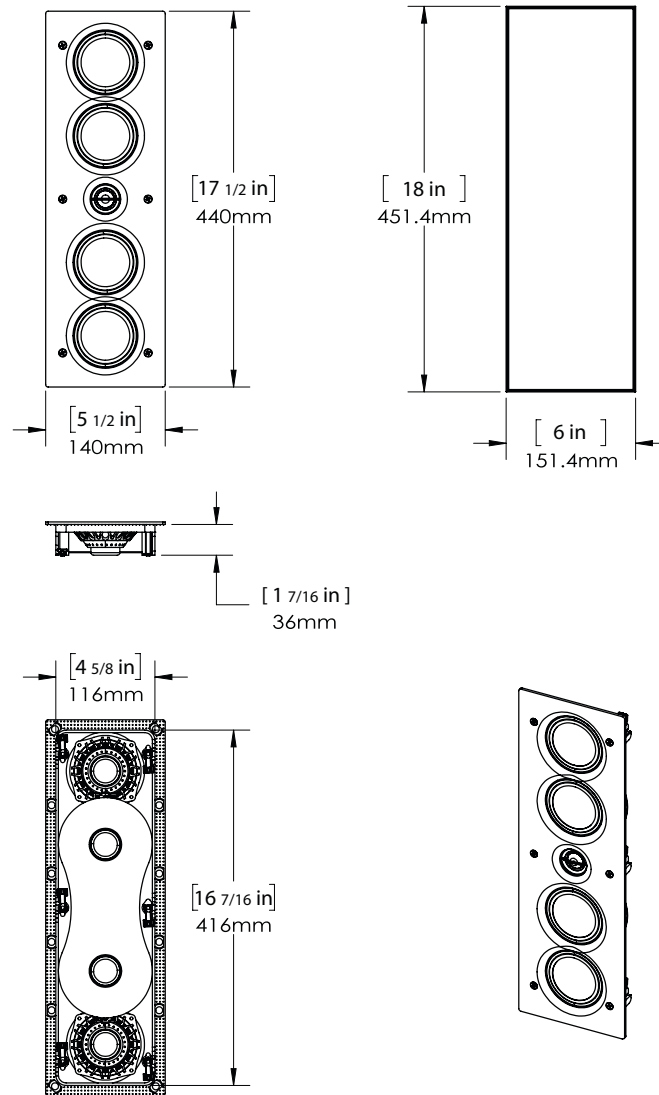

TFIW37EX



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.