

### EASY, PORTABLE, BEAUTIFUL

A slight departure from traditional architectural loudspeakers, soundbars are a new necessity. Simple to install, our passive soundbars are a massive improvement over your flat panel's internal audio system. Add a floor standing or architectural subwoofer, and you'll be enjoying your television like never before.

#### PRODUCT ID

SBR41 SBR41-LCR SBR43-50C SBR43-50 TO SBR43-85

The SBR41 & SBR41-LCR are single channel enclosures that can be placed on the Left, Right, or in the Center above or below the video display; or three can be placed in a linear row above or below the video display. The SBR43-50C is a single center channel enclosure. The remaining SBR43-50 to SBR43-85 models contain all three channels: Left, Center and Right.

Our InstaWidth<sup>™</sup> Soundbar Range has been specially developed to extend and can be adjusted in order to exact match any model of TV from 50'' to 85'' widths, for the ideal visual symmetry within a space.



The drivers are mounted in extruded aluminum enclosures and can be mounted on the wall, or attached to a third-party mount connected directly to the video display. Regardless of your choice of mounting and position, the Soundbar and LCR's will deliver pristine music and movie soundtracks and compliment your home theater experience.



#### SPECIFICATIONS

#### ALL MODELS


Woofers	3 ½'' Fiber Glass	
Tweeter	1'' Silk DPSD™	
Frequency Response	65Hz - 20kHz	
Impedance	4Ωper Channel	
Power RMS / Peak	75 Watts / 150 Watts	
Sensitivity	90 dB	
Enclosure	Aluminum Cabinet	
Height & Depth	6" H x 2 <sup>9/16</sup> " D (152 H x 65 D mm)	

MODEL	PART	<b>CHANNELS &amp; FEATURES</b>	LENGTH
SBR41	SBR41000	1 { 1 Tweeter   1 Woofer }	11 <sup>7/8</sup> " - 12 <sup>7/8</sup> " [302 - 327 mm]
SBR41-LCR	SBR41LCR	1 { 1 Tweeter   2 Woofers }	16 <sup>1/16</sup> " - 17 <sup>1/16</sup> " [409 - 434 mm]
SBR43-50C	SBR4350C	1 { 1 Tweeter   2 Woofers   4 Passive Radiators }	<b>42</b> <sup>1/16</sup> - <b>43</b> <sup>1/16</sup> [1070 - 1095 mm]
SBR43-50	SBR43500	<b>3</b> { 3 Tweeters   6 Woofers }	<b>42</b> <sup>1/16</sup> - <b>43</b> <sup>1/16</sup> [1070 - 1095 mm]
SBR43-55	SBR43550	<b>3</b> { 3 Tweeters   6 Woofers }	<b>48</b> <sup>3/16</sup> - <b>49</b> <sup>3/16</sup> [1225 - 1250 mm]
SBR43-60	SBR43600	<b>3</b> { 3 Tweeters   6 Woofers }	<b>52</b> <sup>5/8</sup> '' - <b>53</b> <sup>5/8</sup> '' [1339 - 1364 mm]
SBR43-65	SBR43650	<b>3</b> { 3 Tweeters   6 Woofers }	<b>56</b> <sup>7/16</sup> " - <b>57</b> <sup>7/16</sup> " [1435 - 1460 mm]
SBR43-70	SBR43700	<b>3</b> { 3 Tweeters   6 Woofers }	60 <sup>3/4</sup> " - 61 <sup>3/4</sup> " [1545 - 1570 mm]
SBR43-75	SBR43750	<b>3</b> { 3 Tweeters   6 Woofers }	<b>65</b> <sup>1/8</sup> " - <b>66</b> <sup>1/8</sup> " [1570 - 1595 mm]
SBR43-80	SBR43800	<b>3</b> { 3 Tweeters   6 Woofers }	<b>69</b> <sup>7/16</sup> <b>'' - 70</b> <sup>7/16</sup> [1765 - 1790 mm]
SBR43-85	SBR43850	<b>3</b> { 3 Tweeters   6 Woofers }	73 <sup>15/16</sup> " - 74 <sup>15/16</sup> " [1880 - 1905 mm]





LINE DRAWINGS

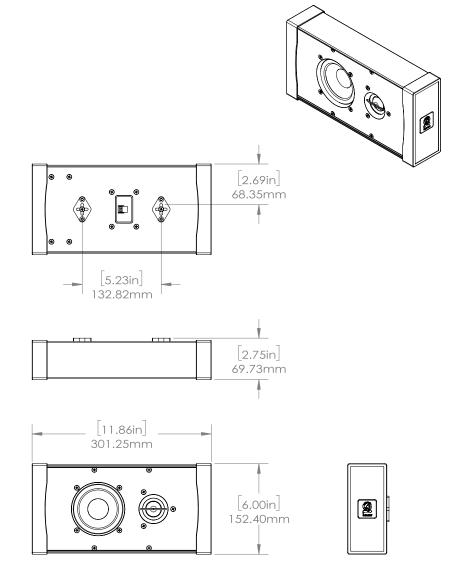

SBR41



LINE DRAWINGS




2.69in 68.35mm 9.29in 236.00mm [2.75in] 69.73mm [16.07in] 408.25mm 6.00in 2 152.40mm

SBR41-LCR





LINE DRAWINGS

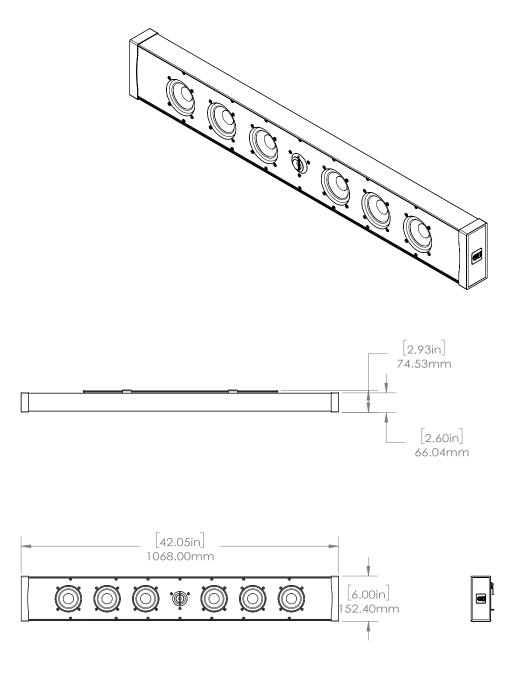








LINE DRAWINGS

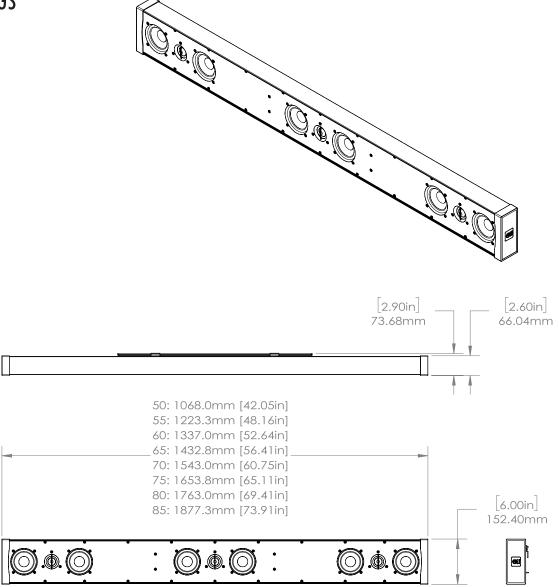

#### SBR43-50 TO SBR43-85

