



# 5" DIRECTOR SERIES

## DETAILS MATTER

The increasing popularity of smaller recessed light openings has created a huge demand for speakers that “line up” with ceiling lighting.

## PRODUCT ID



D59



D57



D57DT/SUR



D50-8

Designed with Architects and Interior Designers in mind, the Director 5" Series aesthetically matches high-end 6" can lights, while still producing excellent sound quality.

Paired with our matching 5" aperture in-ceiling sub and DSP3-150 Amplifier, looking good has never sounded better.


## BUNDLE



D57



DSUB6F5K



DSP3-150

## RESOUNDING CLARITY

The secret of Origin Acoustics' superior sound staging is our patented Dual Plane Stabilization Diaphragm™ Tweeter technology. This patented tweeter design improves high-frequency performance, prevents distortion and increases loudness.



DPSD™ TWEETER



# 5" DIRECTOR SERIES




**SPECIFICATIONS**    **ALL 5" SERIES**

**Cutout Diameter**    5 7/8" (150mm)





**Speaker Diameter**    6 3/4" (172mm)

**Grille Diameter**    7 3/16" (182mm)





**Grille Depth**    3/16" (5mm)

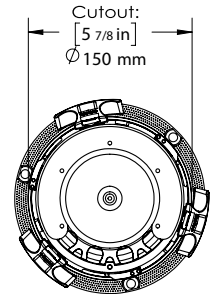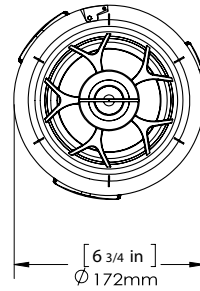





## LINE DRAWINGS

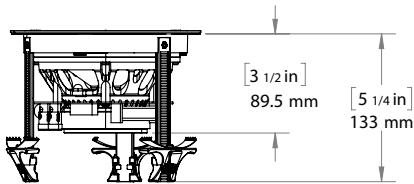

D50-8

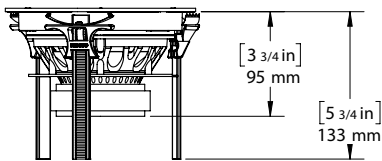

D57-59

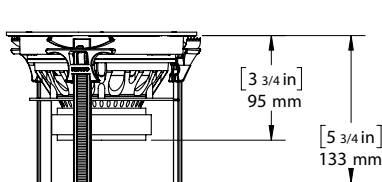

D57 DT/SUR



Please visit [docs.originacoustics.com](https://docs.originacoustics.com) or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.



# 5" DIRECTOR SERIES

SPECIFICATIONS	D59	D57	D57DT/SUR	D50-8
<b>Part</b>	SCD50900	SCD50700	SCD2T50700	SCD5000-8
<b>Tweeter</b>	1" Silk DPSD™ MMP™	1" Silk DPSD™ MMP™	¾" Dual Silk DPSD™	1" Silk Pivoting
<b>Woofers</b>	5 ¼" Kevlar®	5 ¼" Glass Fiber	5 ¼" Glass Fiber	5 ¼" Poly/Rubber
<b>Power Handling</b>	40 - 125 Watts	40 - 125 Watts	40 - 125 Watts	30 - 100 Watts
<b>Frequency Response</b>	68Hz-20kHz	69Hz-20kHz	69Hz-20kHz	74Hz-20kHz (-3dB)
<b>Impedance</b>	6 ohm	6 ohm	6 ohm	6 ohm
<b>Mounting Depth</b>	3 ¾" (95mm)	3 ¾" (95mm)	3 ¾" (95mm)	3 ½" (90mm)



Please visit [docs.originacoustics.com](https://docs.originacoustics.com) or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.