

# **PERFORMANCE SUBWOOFERS**



#### **OVFRVIFW**

The goal of our Performance Collection of subwoofers is to offer the absolute best bass reproduction at a competitive price point. More power, better drivers, and a more durable finish than other subs in their class.

#### PRODUCT ID



WSK200 WIRELESS TRANSMISSION KIT **TRANSMITTER** 



WSK200 WIRELESS TRANSMISSION KIT RECEIVER



SUBV12P



SUBV10P



SUBV8P

### **DUAL WOOFER IMPACT**

To move enough air to create the thumping bass we all deserve, we've added a passive radiator to our all-new Performance Series of subwoofers. This passive diaphragm reacts to the changing air pressure within the cabinet, virtually doubling your woofer's ability to create sound without drawing additional power. As a result, even smaller cabinets like these can create impactful low frequencies.

### PREMIUM FINISH

Our brushed hybrid finish is durable and easy on the eyes. This thick, textured wrap looks and feels much more luxurious than the standard vinyl finishes you might see in other subwoofers at this price point.

### **WIRFLESS** TRANSMISSION KIT

This full-range wireless audio transmitter is amazing for subwoofers or surrounds, or even a pair of bookshelf speakers you'd like to bring into the rest of the system.

## PERFORMANCE SUBWOOFERS



MODEL	SUBV12P	SUBV10P	SUBV8P

**Part** Woofer

Wooter

Amp

Max Power Input
Power Rating Peak
Frequency Response
Subwoofer Output

Outputs Inputs

Phase Control Auto-on

Crossover Sensitivity

Dimensions without Feet

Dimensions with Feet

Weight

SUBV12000P

12" (305mm) Front-Firing Custom Resin Coated Paper Cone with 12" Down-Firing

Passive Radiator 300W Class D Amp 200 Watts

500 Watts Peak 21Hz-320Hz 101dB SPL

RCA, Line Level High-Pass Left & Right Line Level, LFE

0 - 180° 5mV

55Hz - 320Hz | 150Hz LFE

88 +/-3dB

14  $^3\!\!4\text{"}$  W x 15  $^{9/16}$  L x 14  $^{3/4}$  H

(375mm x 396mm x 375mm) 14 3/4" W x 15<sup>9/16</sup>"L x 16 <sup>5/8</sup>" H

(375mm x 396mm x 423mm)

30.3 lbs (13.8 kg)

SUBV10000P

10" (254mm) Front-Firing Custom Resin Coated Paper Cone with 10" Down-Firing

Passive Radiator 200W Class D Amp

200 Watts 350 Watts Peak 28Hz-200Hz 99dB SPL

RCA, Line Level High-Pass Left & Right Line Level, LFE

0 - 180° 5 8mV

50Hz - 320Hz | 150Hz LFE

86 +/-3dB

13  $\frac{1}{4}$ " W x 14  $\frac{1}{16}$ " L x 13  $\frac{1}{4}$ " H (337mm x 358mm x 337mm) 13  $\frac{1}{4}$ " W x 14  $\frac{1}{16}$ " L x 15  $\frac{1}{8}$ " H

(337mm x 358mm x 385mm)

25.9 lbs (11.8 kg)

SUBV8000P

8" (203mm) Front-Firing Custom Resin Coated Paper Cone with 8" Down-Firing

Passive Radiator 180W Class D Amp

180 Watts 320 Watts Peak 32Hz-200Hz 95dB SPL

RCA, Line Level High-Pass Left & Right Line Level, LFE

0 - 180° 5.8mV

50Hz - 320Hz | 150Hz LFE

84 +/-3dB

11 <sup>3</sup>/<sub>4</sub>" W x 12 <sup>9/16</sup>" L x 11 <sup>3</sup>/<sub>4</sub>" H (298mm x 318mm x 298mm) 11 <sup>3</sup>/<sub>4</sub>" W x 12 <sup>9/16</sup>" L x 13 <sup>5/8</sup>" H (298mm x 318mm x 346mm)

30.3 lbs (13.8 kg)

#### UNIVERSAL FFATURES

Auto/On/Off Auto Off: 20 min

110 - 220V Voltage Switch

5V USB OUT

Power Usage: Stand by: 1W

ON (no signal): 8W Max Power: 360W





Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.


# PERFORMANCE SUBWOOFERS





### LINE DRAWINGS

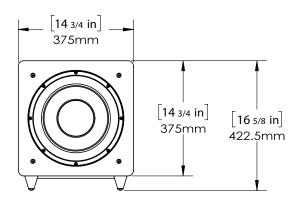




















SUBV8P



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.

### PERFORMANCE SUBWOOFERS



MODEL WSK200

WIRELESS TRANSMISSION KIT (ONE KIT PER SUBWOOFER)

Part WSK2000

Operating Voltage DC 5V / 55mA

RF Frequency Band 2403 MHz - 2479 MHz

RF Channels 77 (1MHz channels spacing)

Modulation GFSK

Working Distance 20M / light of sight or up to 30M Frequency band 20Hz - 20kHz (CD Audio quality)


Sampling Frequency 24KHz / 16 Bit

Delay Time 32mS

THD+N(dB) 0.1% @1 KHz SNR(dB) 62 dB @1 KHz

Dimensions 2 3/8 Dia X 3/4 Thickness (70mm Dia X 18mm Thickness)

### LINE DRAWINGS

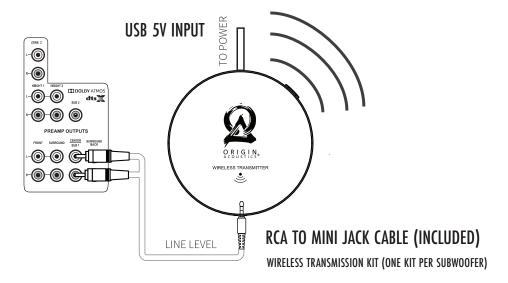



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.