



ROCK LOUDSPEAKERS

OVERVIEW

These rocks are designed to seamlessly simulate natural rocks in your landscape.

When a natural aesthetic is required, there is nothing like a rock speaker to fit the bill. Using a polyurethane/resin composite that is incredibly durable, the stone-like exterior will survive the harshest environments and provide quality sound for years to come.

PRODUCT ID



OSR85



OSR65



OSR8SUB

TAPS

These 70V/8Ω rock speakers feature multiple taps off the transformer, adjusted by a rotary switch on the bottom side of the speaker. The higher the wattage selected, the more output will be generated by the speaker.



MIX & MATCH

Available in 6" and 8" two-way designs and offering an additional 8" subwoofer, these speakers can stand on their own, or be mixed with the rest of the Landscape Collections as the application demands.



ROCK LOUDSPEAKERS

SPECIFICATIONS

OSR85

Part	OSR8500
Woofers	8" Injection Polypropylene with Rubber Surround
Tweeter	1" (25mm) Titanium
Frequency Response	40Hz – 20kHz
Power Handling	5–100 watts
Impedance	8 Ω 70V – 60W / 30W / 15W / 7.5W Transformer Taps
Dimensions	15 x 21 x 16" (38 x 52 x 39 cm)
Weight	11 lbs (5 kg)
Environment Temp	-13° - 149°F (-25°C - 65°C)

SPECIFICATIONS

OSR65

Part	OSR6500
Woofers	6" Injection Polypropylene with Rubber Surround
Tweeter	1" (25mm) Titanium
Frequency Response	50Hz – 20kHz
Power Handling	5–100 watts
Impedance	8 Ω 70V – 30W / 15W / 7.5W / 3.7W Transformer Taps
Dimensions	12 x 17 x 14" (29 x 43 x 35 cm)
Weight	11 lbs (5 kg)
Environment Temp	-13° - 149°F (-25°C - 65°C)



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.





ROCK LOUDSPEAKERS

SPECIFICATIONS



OSR8SUB

Part	OSR800SUB
Woofer	8" Polypropylene with Rubber Surround
Frequency Response	35Hz – 150Hz
Power Handling	5–100 Watts
Impedance	8 Ω 70V – 120W / 60W / 30W / 15W Transformer Taps
Dimensions	15 x 21 x 16" (38 x 52 x 39 cm)
Weight	22 lbs (10 kg)
Environment Temp	-13° - 149°F (-25°C - 65°C)

LINE DRAWINGS

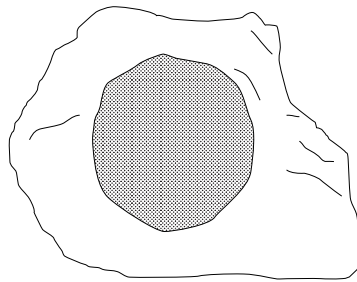

OSR85



OSR65



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.