


MOS36SUB MINIMAL OPENING SUBWOOFER



SIMPLE INSTALL, HUGE SOUND As part of our smallest yet largest feat so far, the Minimal Opening Subwoofer compliments our Minimal Opening System™, the revolutionary fully in-ceiling audio system that mimics the appearance of 4" designer lighting.

Customized to match the unique appearance of home lighting, the custom finish blends seamlessly into the ceiling alongside lights for a sophisticated uniform look.

PRODUCT ID

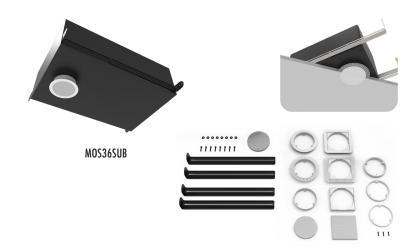

CLEAN & COMPACT BASS

Enhancing the range of sound created by the orginal MOS36K Minimal Opening System by Origin, this Minimal Opening Subwoofer delivers amazing deep bass within the most restrictive environments.

REVOLUTIONARY PRE-CONSTRUCTION MOUNTING

Uniquely engineered to grant a simple installation process; built-in rails secure the subwoofer enclosure into the ceiling, with the exact dimensions to ensure a tight fit between ceiling joists.

PREMIUM CHOICE TRIM-RINGS

The included Trim-Ring Kit includes 6 different designs, offering the latest, invisible flushmount trim-ring options, and both round & square grilles, allowing the ideal trim to be selected to match any interior.

MOS36SUB SPECIFICATIONS



SPECIFICATIONS

System Type
Driver Components

Crossover

Frequency Response

Maximum SPL @ 1m System coverage Sensitivity, 1W/1m

Power RMS Power Peak

Recommended Amp Nominal Impedance

Input Connectors

Enclosure Mounting

MODEL
PART
Height
Width
Length

Weight

MOS36SUB

Minimal Opening Subwoofer

Two 61/2" Poly Cone Subwoofers

DSP Recommended LPF 160Hz or less

24 dB BW

31Hz - 250Hz [- 10 dB]

42Hz - 170Hz [-/+ 3 dB]

102dB Continuous, 107dB Peak

100-degree conical

88 dB

100 Watts

200 Watts

50 - 250 Watts (FCT) @ 4 Ω

6Ω

Gold Plated Spring Push Terminals

MDF


Overlapping Formed Steel Straps, Adjustable from 14.5" – 22.5"

MOS36SUB

MOS3600SUB

6 ^{3/4}" (172 mm) 14" (356 mm) 22" (559 mm) 29.5lbs (13.4kg)

LINE DRAWINGS



TRIM-RING KIT:

A. SPACERS B. TRIM RINGS B. TRIM RINGS D. GRILLES


A1. B1. B4. D1.

A2. B2. B5. D2.

A3. B3. B6.

C. SQUARE TRIM ADAPTER RING

(I.

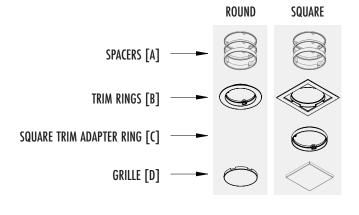



Please visit docs.originacoustics.com or scan the QR code using your smart device for the most up to date specifications and use instructions for this product. Products may only be purchased through an authorized integration partner.